
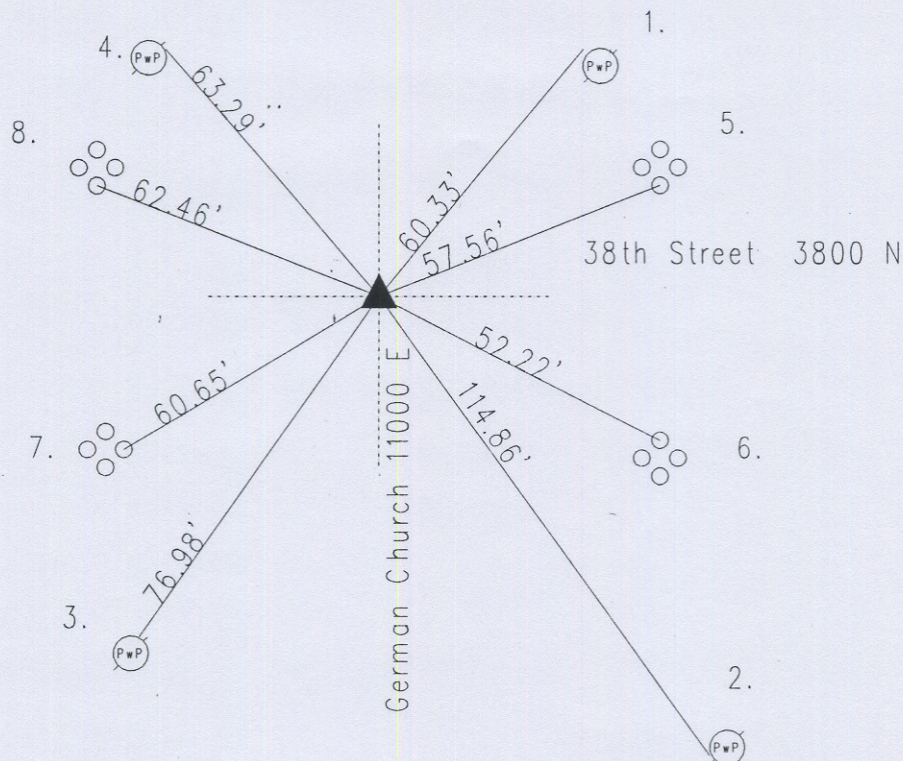


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 22 TOWNSHIP 16 RANGE 5
DATE: 10-02-06
PARTY CHIEF: Wilcoxen
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 6-20-06

IN. S.P.C. E ZONE NAD '83
NAME: 16052201
N: 508300.2880(m)
E: 73861.5700(m)

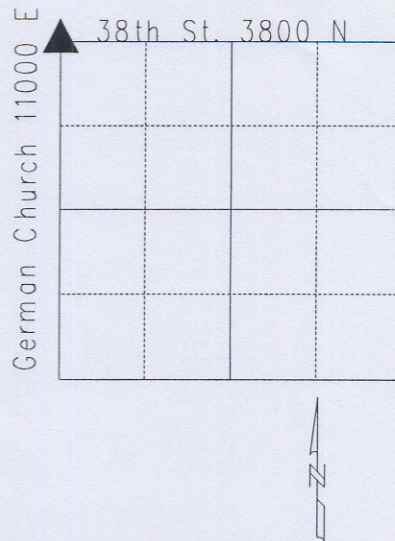

16052201

REF.	DISTANCE	DESCRIPTION
1.	60.33'	Mag nail NW PwP#106-421F 2"up
2.	114.86'	Mag nail w/bw SW PwP#108-421B 48"up
3.	76.98'	Mag nail w/bw NE PwP#82-421D 48"up
4.	63.29'	Mag nail NE PwP#17-421D 18"up
5.	57.56'	Cut 'x' S bolt of aluminum pole base
6.	52.22'	Cut 'x' N bolt "
7.	60.65'	Cut 'x' E bolt "
8.	62.46'	Cut 'x' W bolt "

CORNER HISTORY: Corner originally set as a post in 1820 by John Hendricks with witness: 20" beech S 50 E 13 links; 16" dogwood N 81 W 25 links per Marion County Atlas pg. 15. A survey 9-1-1851 by D. B. Hosbrook called found stone at SE corner of section 16-16-5 per Warren Township Legal Survey Book pg. 57. A survey dated 11-23 thru 26, 1861 by O. W. Voorhis called only distances to a point per Warren Township Legal Survey Book pg. 10. A survey 4-12-1866 by Wm. P. Smith called for a stone @ SW corner of 15-16-5 no witness per (Warren Book pg.27.) A survey 3-8 thru 11, 1892 by J. M. Bell called stone found no witness per (Warren Book pg. 48). Reference dated 12-7-1946 by MCSO called stone found 10" down, 3/4" pipe over stone 3" down. Reference 8-9-1963 by MCSO called railroad spike. Old tie card no date or person listed but called for a railroad spike. Reference dated 7-23-69 by McLand called the corner plug in metal box. Reference dated 3-16-88 by Gries called a brass plug in steel box. Reference dated 1-25-93 by Wilcoxen called brass plug in steel box 3" down. Reference 6-6-04 by Wilcoxen called same 3" down. Reference dated 9-29-06 by Wilcoxen called found brass plug in steel box 4" down, found stone under brass plug 15" down, set Harrison over stone.